
## **TOGGLE LATCH**

## HL105

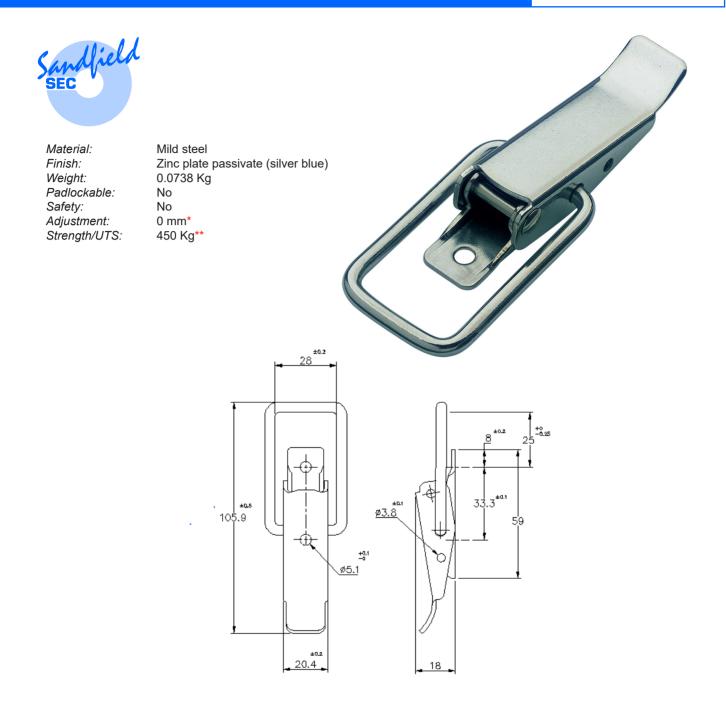

## **CATCH PLATE & ACCESSORIES**

See PT NO: HL01-CP HL02-CP

\**Adjustment* – Provided by internal screwed spindle. Adjustment allows for fitting tolerance and tension adjustment. If the above table shows '0' thre is no adjustment available on this fastener.

\*\*Strength /UTS - The figures for the ultimate tensile strength (UTS) have been determined by tensile tests in a normal working load direction on standard products and do not include any safety factors. A maximum load rate of 30mm per minute was applied throughout the tests. The UTS figures are shown in Kilograms and for a safe working load we suggest that approximately half of the ultimate strength figure is used.