



**Power Locator, dual shaft, 40 bore, 20 & 40 stroke, integrated sensing, side mounting.**

Working air pressure 2-8 bar  
 Dry air is permissible.  
 Restrictors must be used in conjunction with cylinder

**Sensing Options**  
 ES1 Electric Switches




**Weight**  
 20 Stroke - 1.1 Kg  
 40 Stroke - 1.2 Kg

**Stroke**  
 20, 40

**Shaft Position**  
 S21, S22

**Sensor Position**  
 IL, IR

**To Order:**  
**XLP40-2-2-ES1-IR-40-S21**

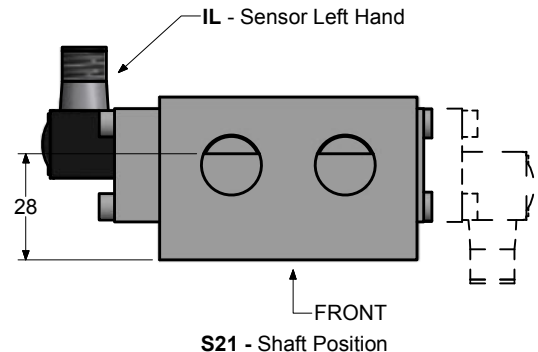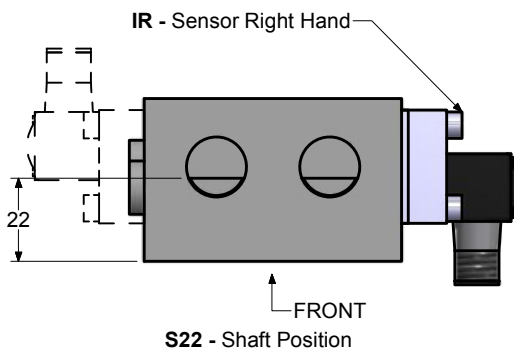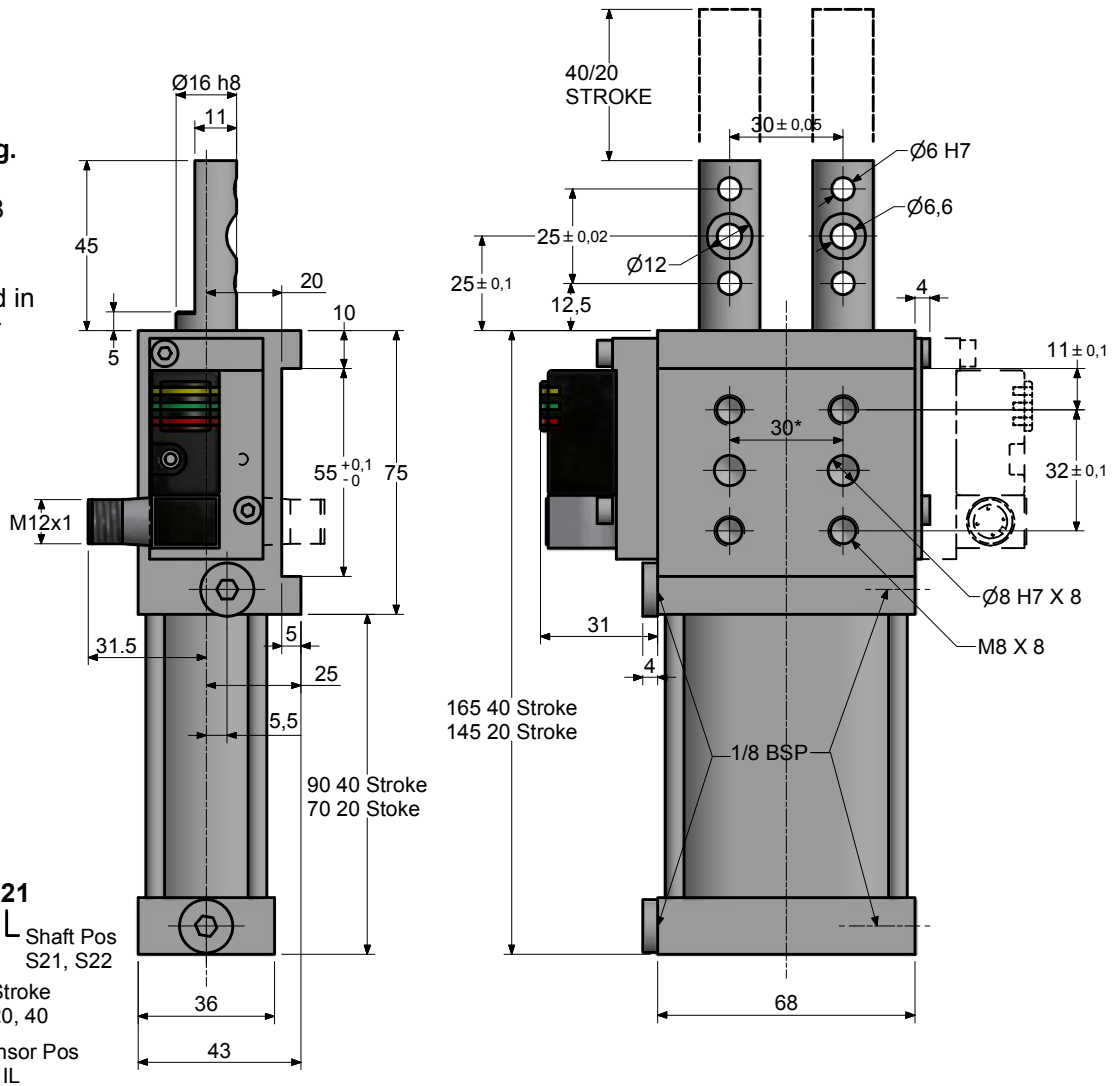

\* For dowel holes  $\pm 0.02$   
 For screw holes  $\pm 0.2$