

LOCATOR

XLP63-2-3



Power Locator, dual shaft, 63 bore, 40 & 60 stroke, integrated sensing, side mounting.

Working air pressure 2-8 bar
 Dry air is permissible.
 Restricters must be used in conjunction with cylinder



Sensing Options
 ES1 Electric Switches

Weight
 40 Stroke - 4 Kg
 60 Stroke - 4.2 Kg

Stroke
 40, 60

To Order:
XLP63-2-3-ES1-IR-40

Sensor Pos
 IR, IL
 Stroke
 40, 60

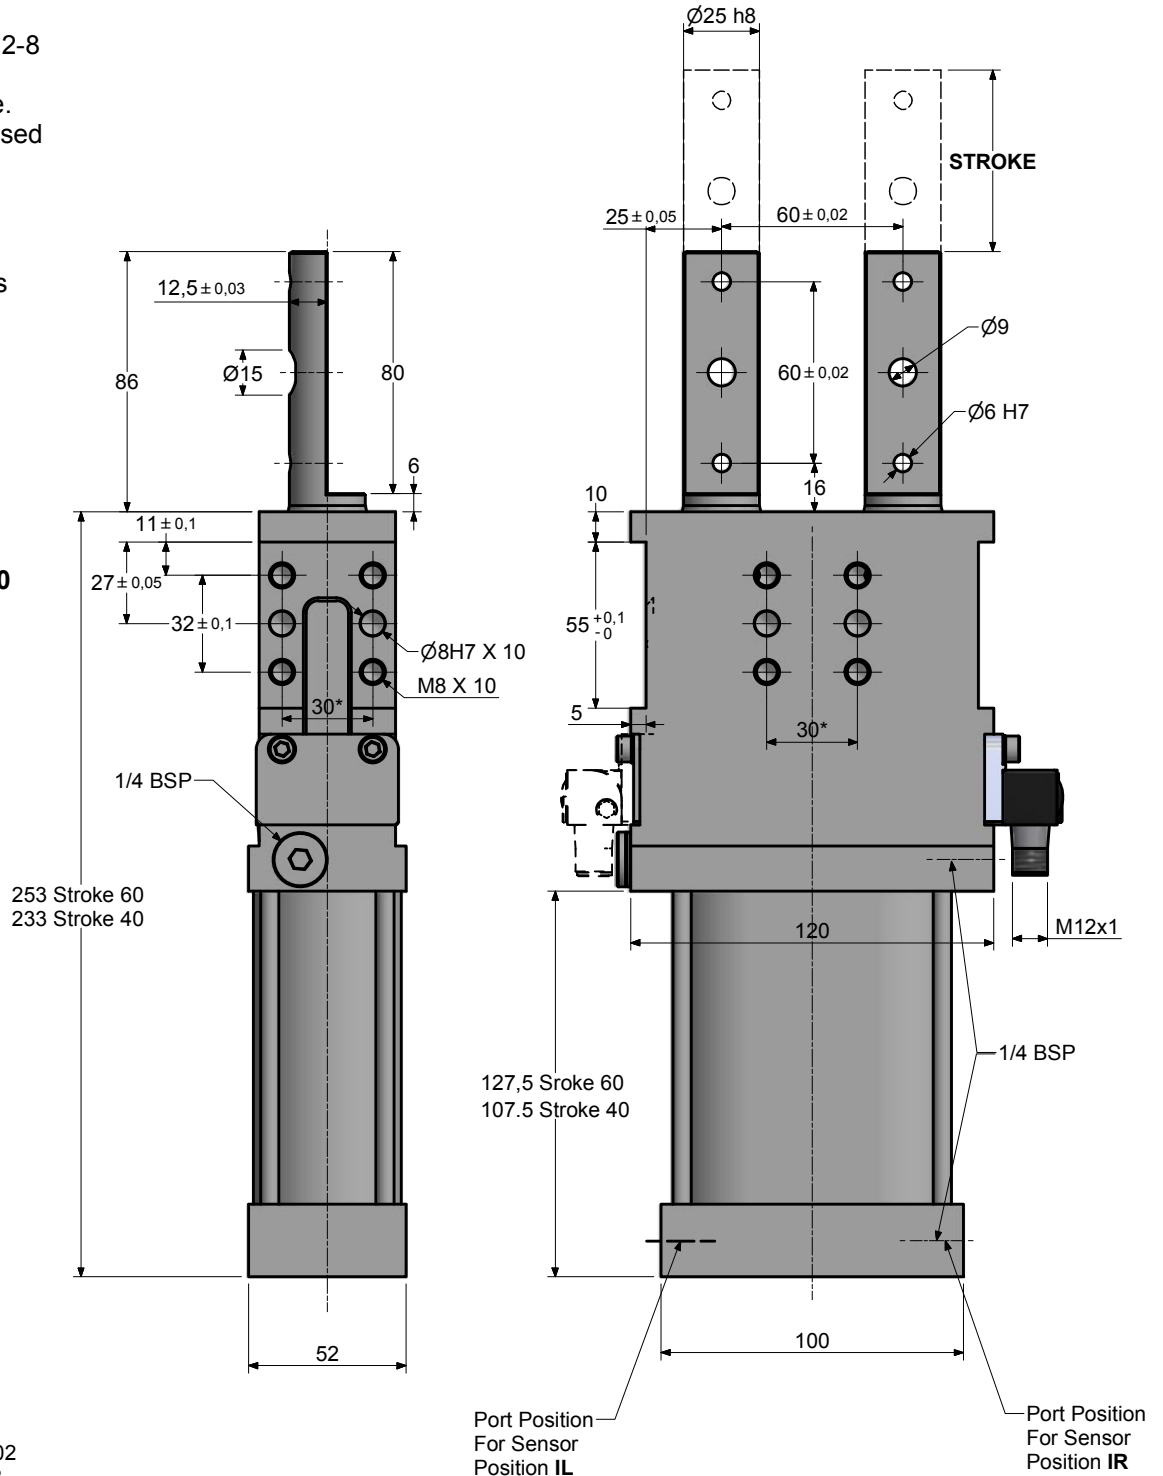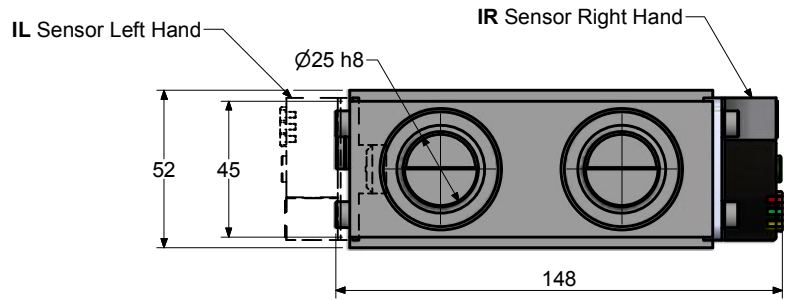

* For dowel holes ±0.02
 For screw holes ±0.2