



Nose mounted plunger clamps may be mounted in a plain or tapped hole allowing the clamps to rotate through 360° for handle positioning. Clamps toggle in forward and back positions.

CP20


Material: Heavy gauge steel
Hardened pins and bushes

Finishing: Zinc plated body
Copper plated plunger

Supplied with: 5x30mm spindle

Max Holding pressure: 120daN

Weight: 0.2Kgs

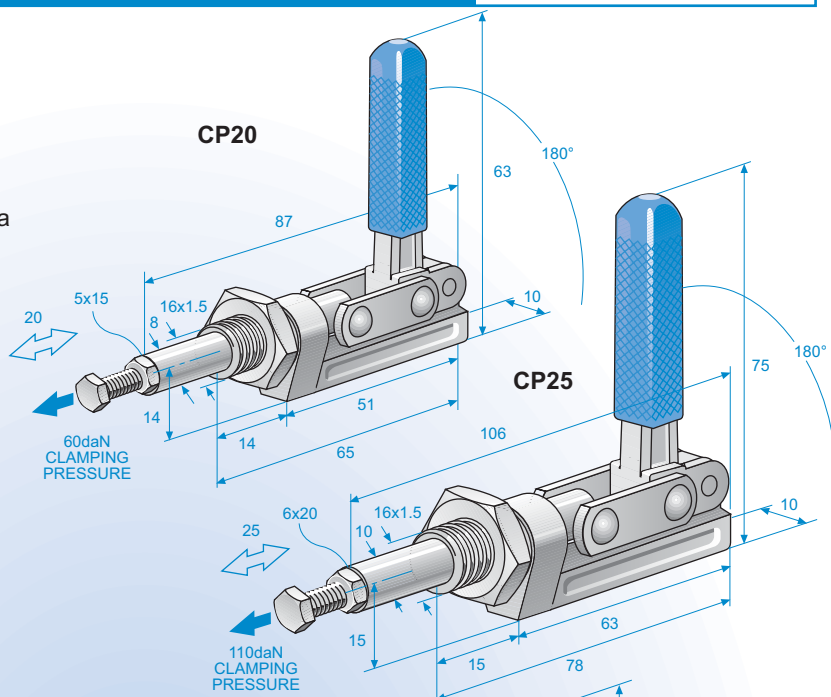

CP25

Material: Heavy gauge steel
Hardened pins and bushes

Finishing: Zinc plated body
Copper plated plunger

Supplied with: 6x40mm spindle

Max Holding pressure: 210daN

Weight: 0.27Kgs

CP50


Material: Heavy gauge steel
Hardened pins and bushes

Finishing: Zinc plated body
Copper plated plunger

Supplied with: 8x40mm spindle

Max Holding pressure: 410daN

Weight: 0.43Kgs

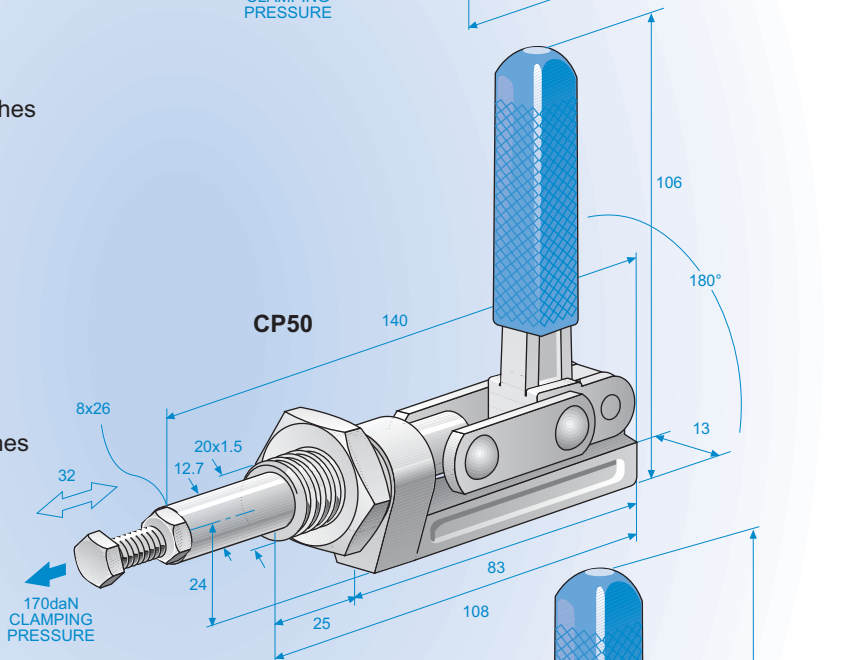

CP60


Material: Heavy gauge steel
Hardened pins and bushes

Finishing: Zinc plated body
Copper plated plunger

Supplied with: 10x60mm spindle

Max Holding pressure: 600daN

Weight: 1.5Kgs

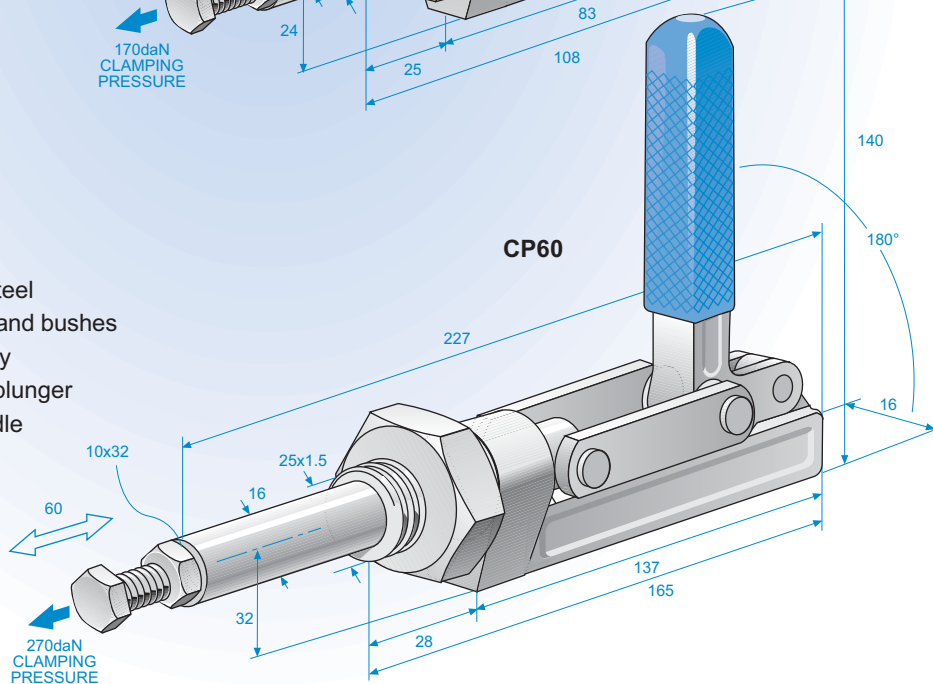

Refer to accessory pages for further information