





To Order: (Product type)-(Dimension A)-(Dimension C)

Ordering code example: HF100-1000-400

TYPE	HF50	HF75	HF100	HF400
Capacity (l)	50	75	100	400
Filling Weight (kg)	50kg	75kg	100kg	100kg
Drive unit	SEC-LF4	SEC-LF4	SEC-LF4	SEC-LF4
Voltage	240V / 50Hz	240V / 50 Hz	240V / 50Hz	240V / 50Hz
Rating in amps	6(A)	6(A)	6(A)	6(A)
Vibration frequency *	50Hz	50Hz	50Hz	50Hz
Protection type	IP54	IP54	IP54	IP54
Length of connection cable (mm)	2000	2000	2000	2000
A (mm)	600-1200	600-1200	600-1200	412-662
B (mm)	282	342	422	838
C (mm)	150-400	150-400	150-400	150-500
D (mm)	500	500	500	672
E (mm)	700	700	700	1080
F (mm)	0-50	0-50	0-50	0-140

*Vibration frequency shown as half wave. Full wave option available (100Hz)

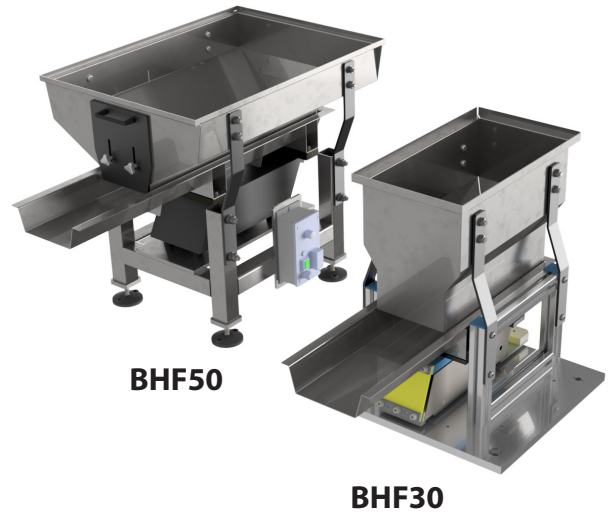

TYPE	BHF30	BHF50
Capacity (l)	30	50
Filling Weight (kg)	50kg	75kg
Drive unit	SEC-LF4	SEC-LF4
Voltage	240V / 50Hz	240V / 50 Hz
Rating in amps	6(A)	6(A)
Vibration frequency *	50Hz	50Hz
Protection type	IP54	IP54
Length of connection cable (mm)	2000	2000
A (mm)	200-350	320-600
B (mm)	385	273
C (mm)	100-300	150-400
D (mm)	276	500
E (mm)	488	700
F (mm)	0-60	0-40

*Vibration frequency shown as half wave. Full wave option available (100Hz)